
TRACTOR TRAILER PT-4-6U

This trailer series was built for transportation of various piece, packaged, bulky agricultural goods, with the exception of rock fragments and cobblestones, as well as for transportation (without sides and tarp wagon) of accommodation cabins, containers, vessels and various technological equipment on all types of roads and in the field.

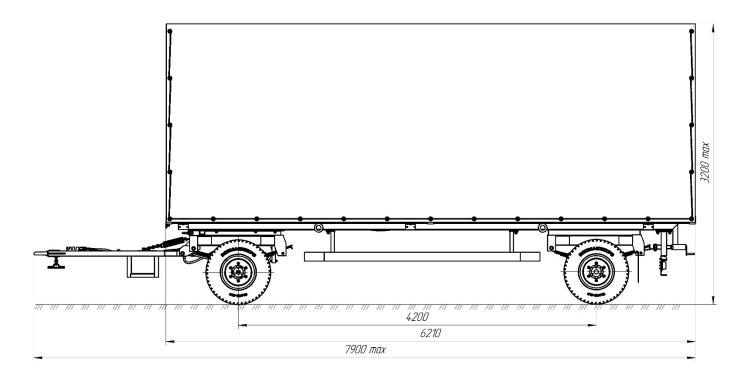

Technical characteristics

| | Parameter | Value |
|----|--|-------|
| 1 | Lifting capacity, kg, max | 4 000 |
| 2 | Tractor drawbar category | 1,4 |
| 3 | Max speed, km/h | |
| | - driving mode | 30 |
| | - working mode | 18 |
| 4 | Axles number, pcs. | 2 |
| 5 | Wheels per axle, pcs. | 2 |
| 6 | Track width, mm, min | 1 850 |
| 7 | Wheel base, mm, min | 4 200 |
| 8 | Ground clearance, mm, min | 310 |
| 9 | Inner body dimensions, mm, max | |
| | - length | 6 130 |
| | - width | 2 330 |
| | - height (with tarp waggon) | 2 060 |
| 10 | Body floor surface, m ² , max | 14,28 |
| 11 | Body volume with tarp waggon, m ³ , max | 29,8 |
| 12 | Weight, kg, max | |
| | - design weight | 1 900 |
| | - full weight (technical permissible) | 6 240 |

| | | T |
|-----|--|-----------------------------------|
| 13 | Weight distribution per axle, kg | |
| | - axle Nr. 1 | 3 040 |
| | - axle Nr. 2 | 3 200 |
| 14 | Overall dimensions, mm, max | |
| | - length | 7 900 |
| | - width | 2 510 |
| | - height (with tarp waggon) | 3 200 |
| 15 | Body floor loading height, mm, max: | 1 200 |
| 1.0 | Min loading height with leaf spring suspension and tires | 1.050 |
| 16 | 10.0/75-15.3, mm | 1 050 |
| 17 | Tire size / pressure, MPa | |
| | - basic | 10.0/75-15.3PR14 130A8 / 0,55 |
| | - option 1 | 9.00-16 PR10 125A6 / 0,35 |
| 18 | Manning level, persons | 1 |
| 19 | Working brake system | |
| | - braking axles number | 1 |
| | - braking mechanism type | drum |
| | - activation type | pneumatic |
| | - activation scheme | single line |
| 20 | Parking brake system | mechanical with manual activation |
| 21 | Lifetime, years, min | 8 |