


Tractor non-dump trailer PT-9-6

This trailer series was built for transportation of various piece, packaged, bulky agricultural goods, with the exception of rock fragments and cobblestones, as well as for transportation (without sides and tarp wagon) of accommodation cabins, containers, vessels and various technological equipment on all types of roads and in the field.

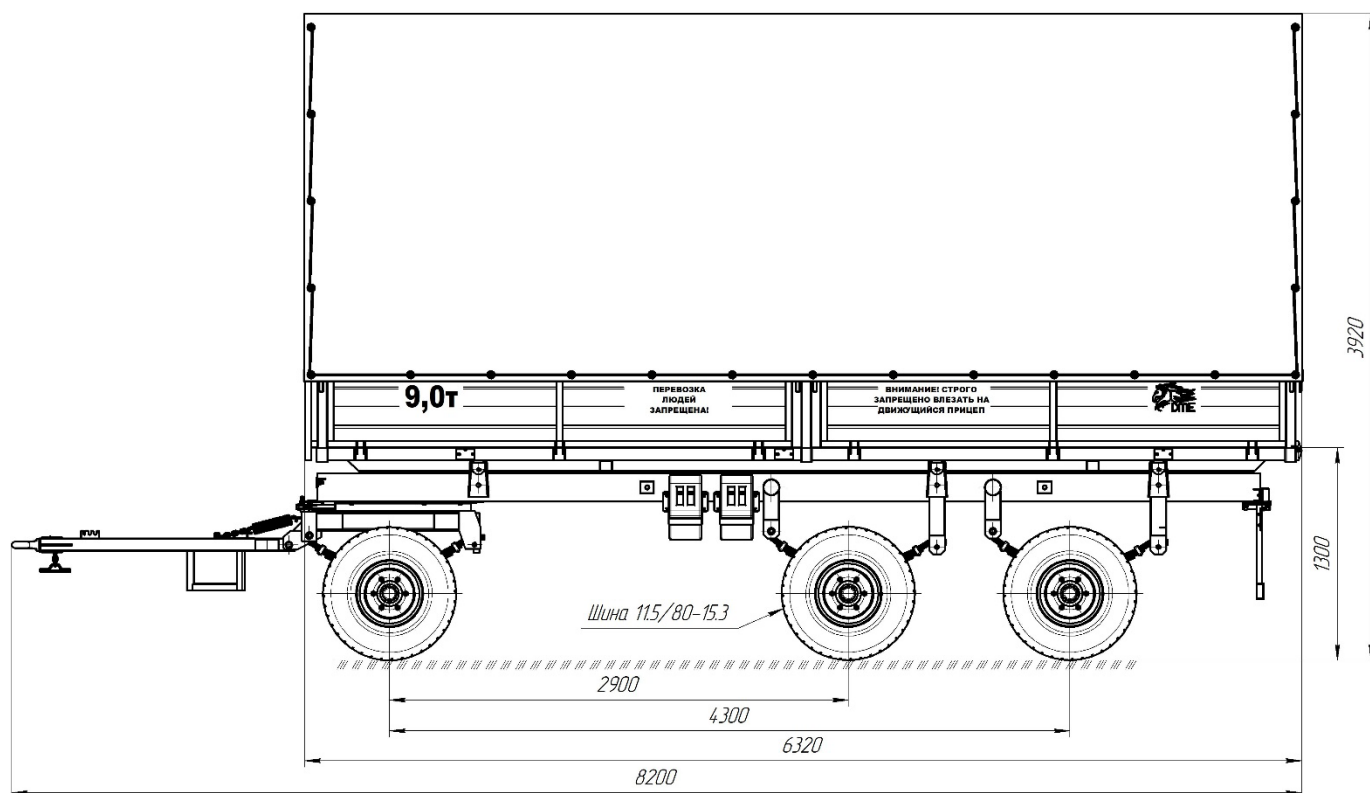

Technical characteristics

Parameter	Value
1 Lifting capacity, kg, max	9 000
2 Tractor drawbar category	1,4-3
3 Max speed, km/h	
- driving mode	30
- working mode	18
4 Axles number, pcs.	3
5 Wheels per axle, pcs.	2
6 Track width, mm, min	1 850
7 Wheel base, mm, min	4 300
8 Ground clearance, mm, min	310
9 Inner body dimensions, mm, max	
- length	6 130
- width	2 130
- height (with tarp waggon)	3 920
10 Body floor surface, m ² , max	13,06
11 Body volume with tarp waggon, m ³ , max	32,3

12	Weight, kg, max - design weight (with sides 630 mm and tarp waggon) - full weight (technical permissible)	3 200 12 390
13	Weight distribution per axle, kg - axle Nr. 1 - axle Nr. 2 - axle Nr. 3	3 530 4 430 4 430
14	Overall dimensions, mm, max - length - width - height (with tarp waggon)	7 900 2 510 3 200
15	Body floor loading height, mm, max	1 300
16	Tire size / pressure, MPa - basic tires - option 1	11.5/80-15.3PR14 139A8 / 0,475 12.5/80-15.3PR14 142A8 / 0,43
17	Manning level, persons	1
18	Working brake system - number of braking axles - brake mechanism type - activation type - activation scheme	2 drum pneumatic single line dual line on request
19	Parking brake system	mechanical with manual activation
20	Lifetime, years, min	8